

FUNCIONS

11. **BLUETOOTH LED:**The Bluetooth name displayed on your phone is ZICO, the LED flashes indicates not connected ;the LED stop flashing indicates that the Bluetooth connection is successful
12. **AUX IN:**3.5mm mini jack input that can be used to connect external audio devices like a tablet,smartphone, computer,etc.

SPECIFICATIONS	ZLX-15A
Frequency Response	45Hz-20KHz
Dimensions	435*380*715mm
High Frequency Driver	Titanium 1.75"
Low Frequency Driver	15"
Output	Line:XLR
Input	MIC:XLR & 1/4" JACK Line:XLR & 1/4" JACK
Power	800W RMS



ZLX-SERIES LOUDSPEAKERS

• ZLX-15A •



SAFETY INSTRUCTIONS:



CAUTION
RISK OF ELECTRIC SHOCK
DO NOT OPEN



CAUTION:To reduce the risk of electric shock,do not open.No user-serviceable parts inside. Refer servicing to qualified service personnel only.



The lighting flash with arrowhead symbol within the equilateral triangle is intended to alert the use or the presence of un-insulated "dangerous voltage" within the product's enclosure that may be of sufficient magnitude to constitute a risk of electric shock.



The exclamation point within the equilateral triangle is intended to alert the user to the presence of important operation and maintenance(servicing) instructions in the literature accompanying this appliance.



This symbol means:indoor use only



This symbol means:Read instructions



This speaker can easily reproduce sound pressure levels(SPL) sufficient enough to cause severe and permanent hearing damage. Always protect your ears when you are exposed for a longer period to SPL in excess of 85dB!

OPERATION MANUAL

OPERATION MANUAL

Thank you for buying our product. To take full advantage of all possibilities, please read these operating instructions very carefully.

FEATURES

- Professional active speaker cabinet for a wide range of differene applications.
- Heavy duty Polypropylene cabinet housing
- **D-CLASS Bi-Amping technology** with separate amplifiers for woofer and tweeter for maxium impact
800W RMS Power
With DSP procedure
- Perfect for both permanent installations and portable use(Rental,DJ,...)
- Balanced MIC+LINE inputs with level
- Balanced LINE output
- Built-in heavy duty carrying handle
- Built-in 35mm stand adapter
- Built-in Rigging points
- High power 15" Woofer
- High power 1.75" Compression Driver

BEFORE USE

- Before you start using this unit, please check if there's no transportation damage. Should there be any, do not use the device and consult your dealer first.
- **Important:**This device left our factory in perfect condition and well packaged. It is absolutely necessary for the user to strictly follow the safety instructions and warnings in this user manual. Any damage caused by mishandling is not subject to warranty. The dealer will not accept responsibility for any resulting defects or problems caused by disregarding this user manual.
- Keep this booklet in a safe place for future consultation. If you sell the fixture, be sure to add this user manual.
- To protect the environment, please try to recycle the packing material as much as possible.

Check the contents:

Check that the carton contains the following items:

- User manual
- ZLX-15A speaker cabinet
- Mains cable

FUNCIONS

1. LCD DISPLAY:shows volume value of MASTER(4) and DSP parameter information.

2. INPUT1 VOLUME:used to set the volume of INPUT1. First always set the volume knob to zero,after that turn it slowly up to the desired level.

3. INPUT1:This input accepts both balanced (3pin-XLR) and unbalanced(6.35 JACK) line level audio signals like for example:CD-player,tuner,MP3-player,...

This input also accepts both balanced and unbalanced microphones,you can use both 6.35 JACK and male 3pin-XLR connectors.

4.MASTER VOLUME:used to set the overall volume of the amplifier.

This knob can also be used to set the DSP parameter.

THE USE OF DSP: Please be kindly noted that it should be operated by audio professionals

- **Encoder, corresponding to screen function**
Press knob(4) shortly to open the menu,rotate the selection function, press OK, rotate to select different options after confirming, press again to return to the selection state.
- **Screen: display the current status and selection function**
 - **EXIT:** Save and leave
 - **MODE:** Curve selection
 - **LOCATION:** Listening mode selection
 - **HIGH EQ:** Extra gain for the treble
 - **MID EQ:** Extra gain for the medium
 - **LOW EQ:** Extra gain for the bass
 - **SUB:** Lift point selection of the bass
 - **DELAY:** Delay between input and output
 - **LED MODE:** Light mode switch
 - **LCD DIM:** LCD DIM is ON, if the brightness of the backlight is greater than 3, the backlight will be set to 3 in standby mode and the brightness will not change in OFF mode.
 - **BRIGHT:**Screen brightness adjustment
 - **CONTRAST:** Adjust the contrast of the display area
 - **RESET:**RESET
 - **INFO:** System Version


5. INPUT2 VOLUME:same functionality as INPUT1 VOLUME,see:(2)

6.INPUT2:same functionality as INPUT1,see:(3)

7. POWER SWITCH:used to switch the internal amplifier on/off.The display screen is flashing(1) while the cabinet is switched on.

8. MAINS INPUT:connect the supplied mains cable here.

9.LINE OUTPUT:This balanced output(3pin-XLR) makes it possible to connect several speaker cabinets together.

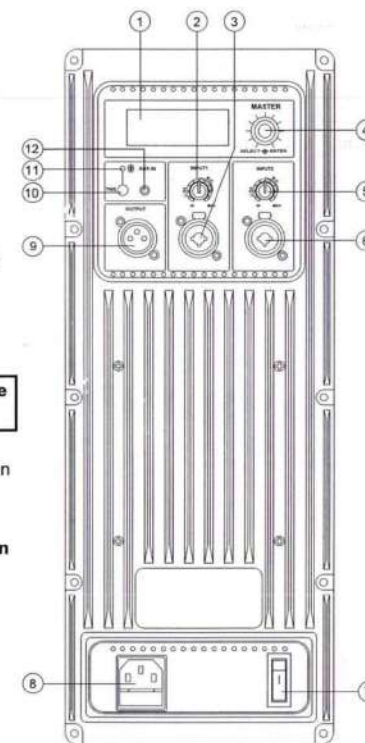

10. BLUETOOTH/TWS SWITCH:

- **Press shortly:** used to switch the Bluetooth on/off. The led(11) is blue and flashing white the Bluetooth is switched on.
- **Press longer:** used to TWS connections; Bluetooth can be used alone, and any two products can also be used by TWS; While two product's Bluetooth is switched on, press and hold the switch(10) of one until the screen(1) shows "TWS-A", another screen(1) shows "TWS-B", then TWS connection is successful; When TWS is connected, press switch(10) longer will cancel TWS connection.