




# EON-SERIES LOUDSPEAKERS

• EON-715A •

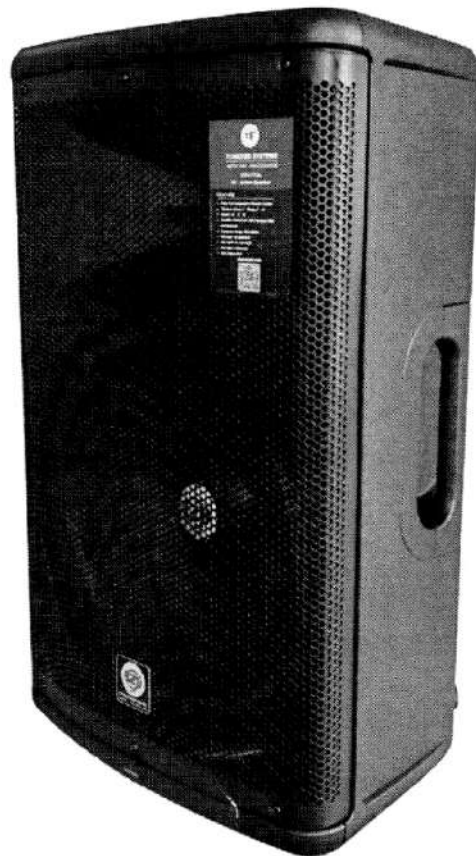

# OPERATION MANUAL

[www.zicopro.com](http://www.zicopro.com)

## OPERATION MANUAL

Thank you for buying our product. To take full advantage of all possibilities, please read these operating instructions very carefully.

### FEATURES

- Professional active speaker cabinet for a wide range of differene applications.
- Heavy duty Polypropylene cabinet housing
- **D-CLASS Bi-Amping technology** with separate amplifiers for woofer and tweeter for maxium impact  
1800W RMS Power  
With DSP procedure
- Perfect for both permanent installations and portable use(Rental,DJ,...)
- Balanced MIC+LINE inputs with level
- Balanced LINE output
- Built-in heavy duty carrying handle
- Built-in 35mm stand adapter
- Built-in Rigging points
- High power 15" Woofer
- High power 2" Compression Driver

### BEFORE USE

- Before you start using this unit, please check if there's no transportation damage. Should there be any, do not use the device and consult your dealer first.
- **Important:** This device left our factory in perfect condition and well packaged. It is absolutely necessary for the user to strictly follow the safety instructions and warnings in this user manual. Any damage caused by mishandling is not subject to warranty. The dealer will not accept responsibility for any resulting defects or problems caused by disregarding this user manual.
- Keep this booklet in a safe place for future consultation. If you sell the fixture, be sure to add this user manual.
- To protect the environment, please try to recycle the packing material as much as possible.


#### **Check the contents:**

Check that the carton contains the following items:

- User manual
- EON-715A speaker cabinet
- Mains cable

## FUNCIONS

1. LCD DISPLAY: information display.

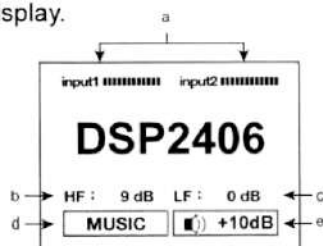

- a.- Output signal level indicators for input channels INPUT 1 and INPUT 2.
- b.- HF: selected value in the PARAMETER 2 > BASS menu.
- c.- LF: selected value in the PARAMETER 2 > TREBLE menu.
- d.- Mode selected in the menu: MUSIC, CLUB, LIVE or SPEECH.
- e.- VOLUME DISPLAY

2. **INPUT1:**This input accepts both balanced (3pin-XLR) and unbalanced(6.35 JACK) line level audio signals like for example: CD-player,tuner,MP3-player,...

This input also accepts both balanced and unbalanced microphones, you can use both 6.35 JACK and male 3pin-XLR connectors.

3. **SIGNAL SELECTOR:**use to select the input1 signal: LINE or MIC INPUT.

4. **USB-input:**used to set the DSP data set.

5. **BLUETOOTH LED:**The Bluetooth name displayed on your phone is ZICO, the LED flashes indicates not connected ;the LED stop flashing indicates that the Bluetooth connection is successful

6. **BLUETOOTH/TWS SWITCH:**

- **Press shortly:** used to switch the Bluetooth on/off. The led(5) is blue and flashing while the Bluetooth is switched on.
- **Press longer:** used to TWS connections; Bluetooth can be used alone, and any two products can also be used by TWS; press and hold the button(6) of one until the LED turns red, another LED turns red, then TWS connection is successful; When TWS is connected, press button(6) longer will cancel TWS connection.

7. **MASTER VOLUME:**used to set the overall volume of the mplifier.This knob can also be used to set the DSP parameter.


**THE USE OF DSP:** Please be kindly noted that it should be operated by audio professionals

• **Encoder, corresponding to screen function**

Press knob(7) shortly to open the menu,rotate the selection function, press OK, rotate to select different options after confirming, press again to return to the selection state.

• **Screen: display the current status and selection function**

- **MODE:** Curve selection,include Music/Club/Live/Speech
- **SUB:** Lift point selection of the bass ,include Off/80Hz/100H/120Hz/150Hz
- **Bass/Treble:** used to adjust the gain of Bass and Treble
- **DELAY:** Delay between input and output
- **LOCATION:** Listening mode selection,include Pole and Bracket
- **Setting:** used to adjust the backlight of LCD

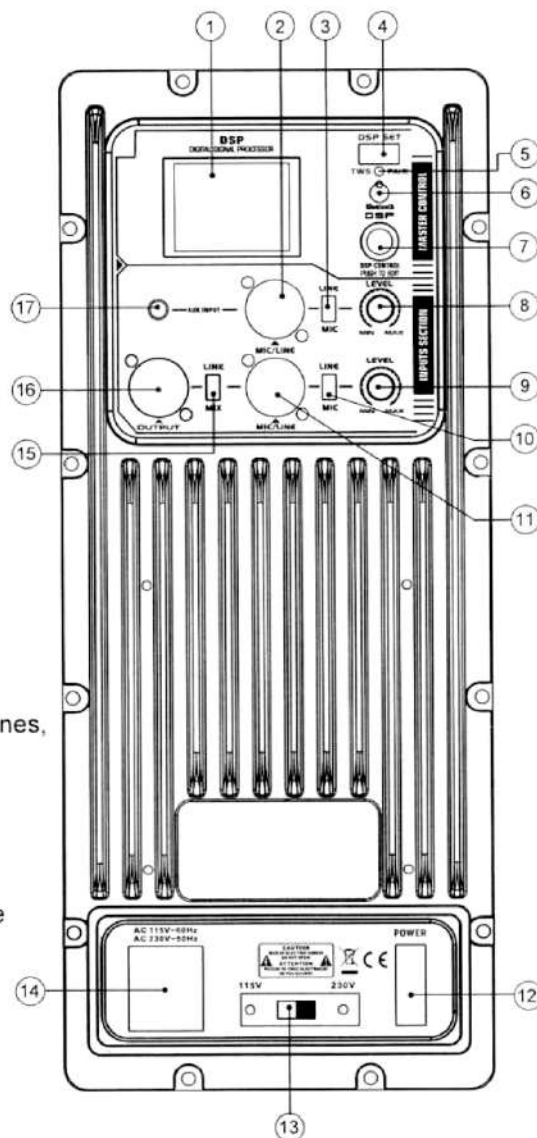

### FUNCIONS

- 8. **INPUT1 VOLUME:**used to set the volume of INPUT1. First always set the volume knob to zero,after that turn it slowly up to the desired level.
- 9. **INPUT2 VOLUME:**same functionality as INPUT1 VOLUME,see:(8)
- 10. **SIGNAL SELECTOR:**use to select the input2 signal: LINE or MIC INPUT.
- 11.**INPUT2:**same functionality as INPUT1,see:(2)
- 12. **POWER SWITCH:**used to switch the internal amplifier on/off.The display screen is flashing(1) while the cabinet is switched on.
- 13. **VOLTAGE SELECTOR:**use to select the mains input voltage,115Vac or 230Vac, Check this switch BEFORE you connect the unit to the mains.
- 14. **MAINS INPUT:**connect the supplied mains cable here.
- 15. **LINK/MIX:**output signal selector  
LINK:INPUT2(11) is played on OUTPUT  
MIX: the mix of INPUT1 and INPUT2 is played on OUTPUT
- 16.**LINE OUTPUT:**This balanced output(3pin-XLR) makes it possible to connect several speaker cabinets together.
- 17.**AUX IN:**3.5mm mini jack input that can be used to connect external audio devices like a tablet,smartphone, computer,etc.

SPECIFICATIONS	EON-715A
Frequency Response	45Hz-20KHz
Dimensions	430*340*700mm
High Frequency Driver	Titanium 2"
Low Frequency Driver	15"
Output	Line XLR
Input	MIC:XLR & 1/4" JACK Line:3.5mm Mini JACK/XLR & 1/4" JACK
Power	1800W RMS

### SAFETY INSTRUCTIONS:



**CAUTION**  
RISK OF ELECTRIC SHOCK  
DO NOT OPEN



**CAUTION:**To reduce the risk of electric shock,do not open.No user-serviceable parts inside. Refer servicing to qualified service personnel only.



The lighting flash with arrowhead symbol within the equilateral triangle is intended to alert the use or the presence of un-insulated "dangerous voltage" within the product's enclosure that may be of sufficient magnitude to constitute a risk of electric shock.



The exclamation point within the equilateral triangle is intended to alert the user to the presence of important operation and maintenance(servicing) instructions in the literature accompanying this appliance.



This symbol means:indoor use only



This symbol means:Read instructions



**This speaker can easily reproduce sound pressure levels(SPL) sufficient enough to cause severe and permanent hearing damage. Always protect your ears when you are exposed for a longer period to SPL in excess of 85dB!**