


ZM-C100

Digital Multimeter

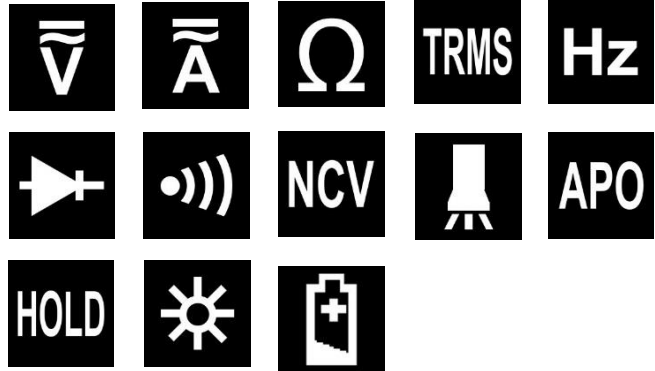

4000 Counts

Specifications	Range	Accuracy
DC Voltage	40.00mV/400.0mV	
	4.000V/40.00V/400.0V/600V	±(0.5%+3)
AC Voltage	40.00mV/400.0mV	
	4.000V/40.00V/400.0V/600V	±(1.0%+3)
DC Current	4.000A	±(1.2%+3)
	10.00A	±(1.2%+3)
AC Current	4.000A	±(1.5%+3)
	10.00A	±(1.5%+3)
Resistance	4.000kΩ	±(0.8%+3)
	40.00kΩ/400.0kΩ/4.000MΩ	±(0.8%+3)
	40.00MΩ	±(1.5%+3)
Frequency	4.000Hz/40.00Hz/400.0Hz/4.000kHz/40.00kHz/ 400.0kHz/3.000MHz	±(1%+2)
Continuity/Diode	●/●	
NCV	●	

Features

Auto ranging	True RMS	Data hold
Backlight/Flashlight	Low battery alert	Auto power off

General

Power Supply	2 x 1.5V AAA Battery
Dimension	120x61x28mm
Weight	117g