


ZM-S400

Smart Digital Multimeter



**4000 Counts
Smart Multimeter**

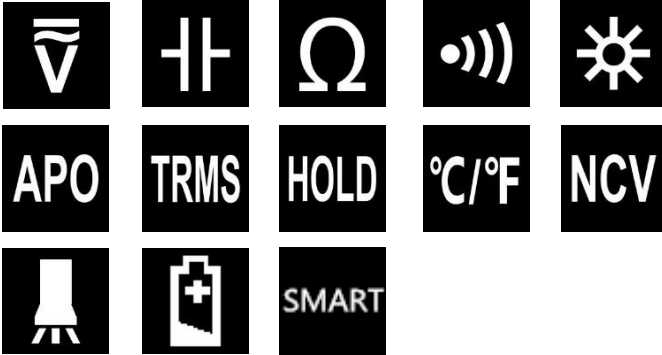

Specifications	Range	Accuracy
DC Voltage	4.000V/40.00V/400.0V/600V	$\pm(0.5\%+3)$
AC Voltage	4.000V/40.00V/400.0V/600V	$\pm(1.0\%+3)$
DC Current	999.9mA	$\pm(1.0\%+4)$
	9.999A	$\pm(1.0\%+4)$
AC Current	999.9mA	$\pm(2.0\%+3)$
	9.999A	$\pm(2.0\%+3)$
Resistance	4.000k Ω	$\pm(1.5\%+3)$
	40.00k Ω /400.0k Ω /4.000M Ω	$\pm(1.0\%+3)$
	40.00M Ω	$\pm(1.5\%+3)$
Capacitance	4.000nF	$\pm(5.0\%+20)$
	40.00nF/400.0nF/4.000 μ F/40.00 μ F/400.0 μ F	$\pm(3.5\%+4)$
	4mF	$\pm(5.0\%+5)$
Frequency	4.000Hz/40.00Hz/400.0Hz/4.000kHz/40.00kHz/400.0kHz/4.000MHz/10.00MHz	$\pm(1\%+2)$
Temperature	-30°C-1000°C (-22°F-1832°F)	
Diode/Continuity	●/●	
NCV	●	

Features		
Auto ranging	True RMS	Data hold
Backlight/Flashlight	Low battery alert	Auto power off
Smart mode		

General	
Power Supply	2 x 1.5V AAA Battery
Dimension	120x61x28mm
Weight	117g